
| TOCK MODULE SETS | | | | | | | | | |
|--------------------------|--------|-----|------|------|------|------|------|------|--|
| 185K | MODELS | | | | | | | | |
| SPECIFICATIONS | T50 | T75 | т100 | T150 | т200 | т300 | т400 | T500 | |
| MODULE CHARGE (gr) | 50 | 75 | 100 | 150 | 200 | 300 | 400 | 500 | |
| MODULE DIAMETER - D (mm) | 34 | 34 | 34 | 34 | 34 | 44 | 44 | 52 | |
| MODULE LENGTH - L (cm) | 9 | 16 | 16 | 32 | 32 | 32 | 32 | 32 | |
| IGNITION WIRE - WL (m) | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | |
| HOLE DIAMETER - HD (mm) | 40 | 40 | 40 | 40 | 40 | 51 | 51 | 64 | |

| MODULE MODELS vs BREAKING CAPACITIES* | | | | | | | | |
|--|-------|--------------------------------|------|--------|--------|-----------|---------|---------|
| MODELS | T50 | Т75 | т100 | Т150 | T200 | т300 | T400 | T500 |
| BREAKING CAPACITY / FACE SHOTS (m³) | NOT P | NOT PRACTICAL FOR THESE MODELS | | | | 2.5 - 3.5 | 3-4 | 4-5 |
| BREAKING CAPACITY / BOULDERS (m³) | 2-4 | 3 - 5 | 4-6 | 6 - 10 | 8 - 12 | 10 - 15 | 15 - 20 | 20 - 25 |

* Considering hard limestone with average outputs

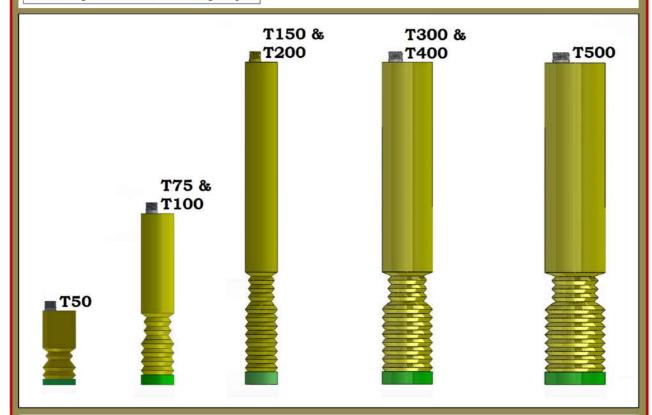

| | NUMBER OF MODULES PER BOX | | | | | | | |
|----------|---------------------------|-----|------|------|------|------|------|------|
| MODELS | T50 | T75 | T100 | T150 | T200 | т300 | T400 | T500 |
| QUANTITY | 324 | 162 | 162 | 81 | 81 | 49 | 49 | 36 |